





## Plasters/renders on very soft substrates

Lime facilitates the application of plaster/render on very soft substrates without resulting in the usual problems of debonding, water infiltration and ultimately the weakening of the structure. The slow hardening of airlime guarantees excellent cohesion with the substrate.

### Work with a render/plaster finishing

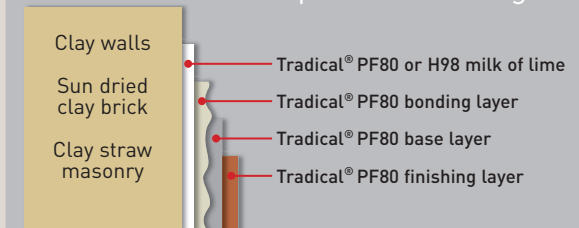

### Work with a lime wash finishing

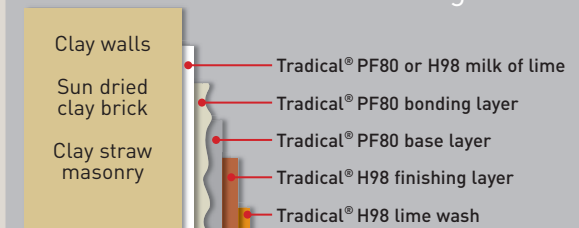

Total thickness of the render/plaster : 20 mm (DTU 26.1)